

A-A (1:5)

VQHV-ISO

Monobodied high velocity pv-valve.

Complete stainless steel 316 execution.


Can be delivered with different flange standards, DIN, ANSI, ISO.

Approvals:

USCG: 162.017/182/0

ABS: 09-LD506128-PDA

ITEM	DESCRIPTION
1	PRESSURE DISC
2	PRESSURE SEAT
3	TEST MECHANISM - LEVR.
4	VACUUM SEAT
5	PRESSURE WEIGHT
6	VACUUM DISC
7	FLAME SCREEN

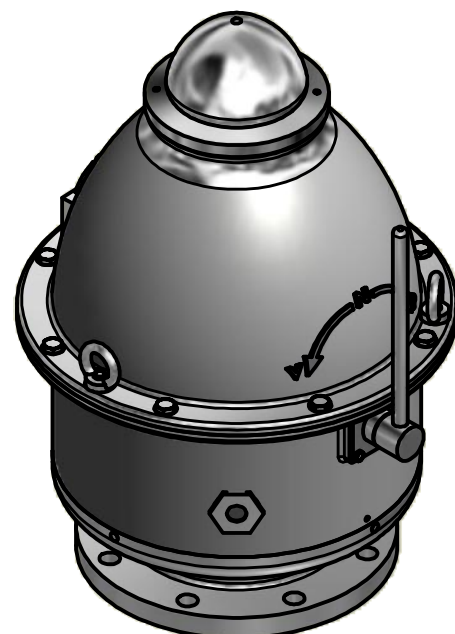

DIM	H	W
2 in	17 ¹⁵ / ₁₆	9 ²⁷ / ₃₂
2 ½ in	18 ²³ / ₃₂	11 ¹³ / ₁₆
3 in	21 ¹⁵ / ₁₆	14 ³¹ / ₃₂
4 in	22 ⁵ / ₁₆	15 ³ / ₄
5 in	22 ⁵ / ₃₂	16 ⁹ / ₁₆
6 in	22 ¹⁵ / ₃₂	17 ²³ / ₃₂
8 in	27 ⁹ / ₁₆	17 ⁵ / ₃₂

ACCORDING TO INTERNATIONAL LAWS THIS DRAWING IS THE PROPERTY OF VENTIQ AS. THE DRAWING AND ITS CONTENT CAN NOT BE MADE PUBLIC, COPIED OR OTHERWISE USED WITHOUT OUR WRITTEN CONSENT.

Designed by	Checked by	Date	Appr. by	Appr. Date	Rev. date	DRAWING NO / FILENAME
BK						Q-AA0170-1.idw
TYPE	SERIE	SPEC.	REDUNDANCY	DRAWING TITLE		
				VQHV-ISO		
FLANGE TYPE	FLANGE SIZE	PART	ANSI 150 lb			
		Q-AA0170-1				

VENTIQ
www.ventiq.com

VENTIQ AS
N-6083 GJERDSVIKA, NORWAY
Phone: +47 70026540
Fax: +47 70026550
Email: office@ventiq.com

Scale	Sheet
A3	1 OF 1
Plot date	Archive